



上海量青光电技术有限公司

1550nmSLD 宽带光源 Broadband Light Source



Description:

1550nm SLED Broadband Light Source, Central wavelength 1550 ± 10 nm, -3dB spectrum width ≥ 50 nm, Output power 1, 5, 10, 20, 30 mW etc, Ripple ≤ 0.2 dB. OEM model is well available on customer's special request.

Applications:

Optical fiber sensing
Optical fiber passive component spectrum testing
Optical fiber grating, filter testing
Optical fiber measurement equipments

Features:

High output power
High stability
Broadband spectrum output

Parameters	Unit	
Part No.	-	LQ-SLED-1550-P-PW-SP
Central wavelength	nm	1550 ± 10 , etc
-3dB Spectral width	nm	≥ 50 , etc
Output power	mW	1, 5, 10, 20, 30, etc
Ripple	dB	≤ 0.2
Output power short-term stability	dB	$\leq \pm 0.01$ dB/15 min
Output power long-term stability	dB	$\leq \pm 0.03$ dB/8 hour
Operating mode	-	CW
Fiber pigtail	-	Single mode SMF-28
Output connector	-	FC/UPC or FC/APC, etc
Operating temperature	$^{\circ}\text{C}$	0 ~ 40
Storage temperature	$^{\circ}\text{C}$	-20 ~ 70
Power supply	-	AC 110/220V $\pm 10\%$, 50Hz, 20W
Dimensions (L×W×H)	mm	90×70×19 Module; 320×220×90 Benchtop

Remark: Stability is tested at room temperature $25 \pm 2^{\circ}\text{C}$ after pre-heating 30 minutes.

1. Test condition: fixed temperature, CW.
2. Test condition: temperature variation $\pm 2^{\circ}\text{C}$, CW.

总机: **021-64778883**


邮箱: **sales@qoptronics.com**

官网: **www.qoptronics.com**

地址: 上海市浦东新区张江高科技园区张江路 **655** 号德宏大厦 **302** 室



上海量青光电技术有限公司

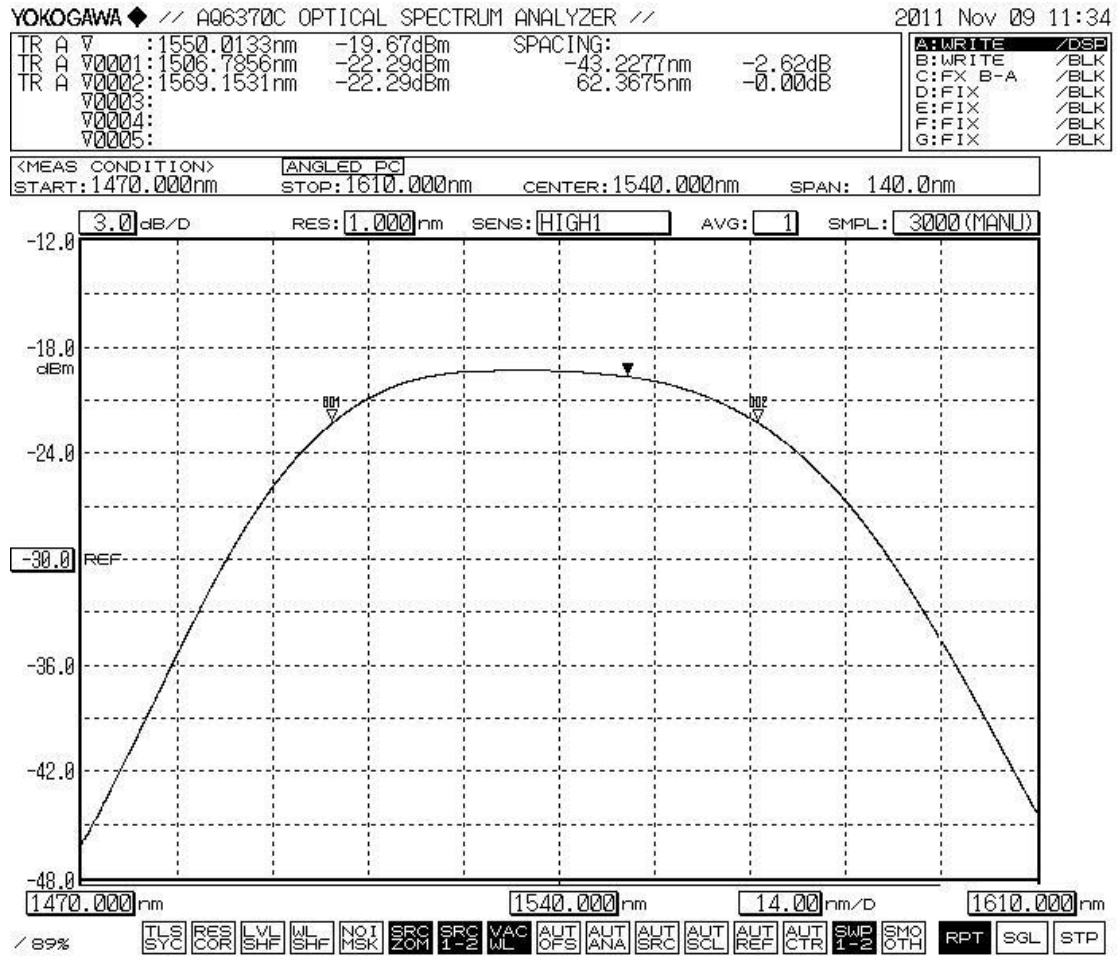

Order Information:

LQ-SLED-1550-P-PW-SP

P:Package, B-Benchtop, M-Module

PW: Output power in mW, example:1-1mW ,5-5mW,30-30mW,etc

SP: Feedback protection, 0-None, 1-Yes

总机: 021-64778883

邮箱: sales@qoptronics.com

官网: www.qoptronics.com

地址: 上海市浦东新区张江高科技园区张江路 655 号德宏大厦 302 室